

HAND DRYERS GW01 15 01 00 Model BLADEflow white finish



Product description

Hands-in hand dryer

Automatic sensor operated

Brushless motor (no maintenance needed)

3 mm ABS cover

Finish: White

HEPA 13 filter included ON/OFF heating element

Efficient dryer: minimum consumption/drying < 15 s.

Outstanding robustness, Heavy duty

3-year warranty

Technical specifications

The hands-in hand dryer consists of a compact body of 3 mm ABS that is mounted against the wall on a carbon steel frame. The frame is fixed to the wall using 5 holes with the dimensions for an 8 mm drill bit. Additionally a security screw is fixed behind the water tank. The dryer is operated by an electronic infra-red sensor and it automatically stops after the hands have been withdrawn from the sensor field or after 18 seconds (vandal-proof disconnection). The air is blown out through a linear matrix of holes for ideal distribution of the air and drying by dragging the water off the hands. Air temperature is controlled automatically. The dryer works with a brushless motor, 220-240V, 35.000 r.p.m. Air speed is 396 km/h which allows drying hands in approximately 10s. The dryer has a total power rating of 1400W with a máximum consumption of 8A. A switch located in one side of the hand dryer offers the possibility of turning off the heating element in order to reduce consumption. HEPA H 13 filter is included in order to remove 99,95% of particles with a minimum size of 0,3µm. Sound level at a distance of 2m is of 76 dB. Total measures of the hand dryer are 680x300x250 mm, with a total weight of 8,5 kg. The hand dryer model is GW01 15 01 00, manufactured by GENWEC WASHROOM S.L. - Calle Joan Carles I, 46-48 - cp.: 08908 L'Hospitalet de Llobregat - Barcelona.www.genwec.com.

Technical characteristics

Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz

Maximum intensity: 8 A Total power: 1400 W

Heating element power: 700 W

Motor power: 700 W Motor type: Brushless Rotor speed: 35.000 r/min Protection class: IP22

Heating element overheat thermostat.

(Automatic reset)

Mechanical specifications

Airflow: 3333 l/min (200 m₃/h)

Air speed: 396 km/h Noise level at 2m: 76 dB

Output air temperature at an ambient T. of 21º C: 40ºC

Outer casing type: ABS 3mm ON/OFF heating element HEPA H13 filter included

Packaging specifications

- Type of individual package: Single cardboard box with expanded polystyrene and a plastic bag
- Dimensions of individual package: 735 x 371 x 330 mm
- Weight of individual package: 9 Kg
- Product dimensions: 680x300x250 mm
- Product weight: 8,5 kg
- Units per box: 1
- Units per pallet: 9 (*)


(*) Height below 1.1 m.

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify the products and their specifications without prior notice

Dimensions: ± 3%

Reviewed by: EJO V_01 (04/2015)



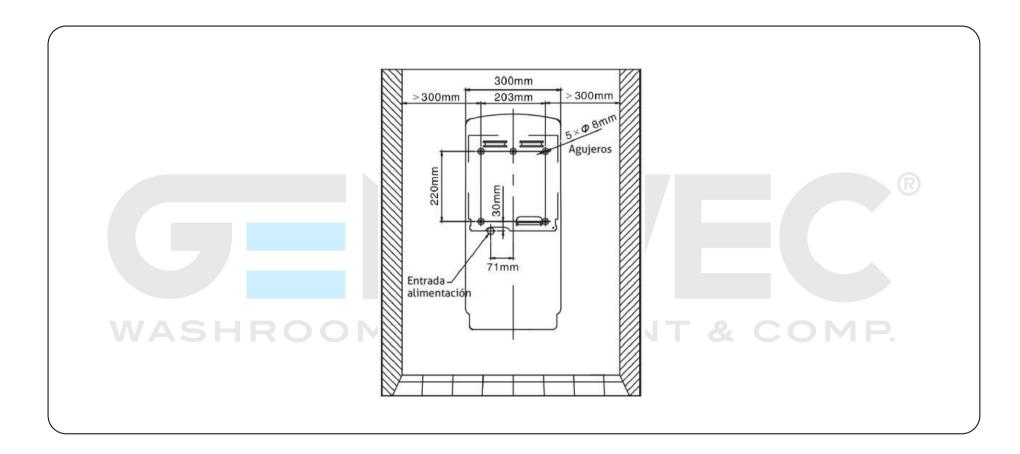

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.