

HAND DRYERS **GW01 15 01 04 Model BLADEflow silver finish**



Product description

Hands-in hand dryer
Automatic sensor operated
Brushless motor (no maintenance needed)
3 mm ABS cover
Finish: Silver
HEPA 13 filter included
ON/OFF heating element
Efficient dryer: minimum consumption/drying < 15 s.
Outstanding robustness, Heavy duty
3-year warranty

Technical specifications

The hands-in hand dryer consists of a compact body of 3 mm ABS that is mounted against the wall on a carbon steel frame. The frame is fixed to the wall using 5 holes with the dimensions for an 8 mm drill bit. Additionally a security screw is fixed behind the water tank. The dryer is operated by an electronic infra-red sensor and it automatically stops after the hands have been withdrawn from the sensor field or after 18 seconds (vandal-proof disconnection). The air is blown out through a linear matrix of holes for ideal distribution of the air and drying by dragging the water off the hands. Air temperature is controlled automatically. The dryer works with a brushless motor, 220-240V, 35.000 r.p.m. Air speed is 396 km/h which allows drying hands in approximately 10s. The dryer has a total power rating of 1400W with a maximum consumption of 8A. A switch located in one side of the hand dryer offers the possibility of turning off the heating element in order to reduce consumption. HEPA H 13 filter is included in order to remove 99,95% of particles with a minimum size of 0,3µm. Sound level at a distance of 2m is of 76 dB. Total measures of the hand dryer are 680x300x250 mm, with a total weight of 8,5 kg. The hand dryer model is GW01 15 01 04, manufactured by GENWEC WASHROOM S.L. - Calle Joan Carles I, 46-48 - cp.: 08908 L'Hospitalet de Llobregat - Barcelona. www.genwec.com.

Technical characteristics

Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz
Maximum intensity: 8 A
Total power: 1400 W
Heating element power: 700 W
Motor power: 700 W
Motor type: Brushless
Rotor speed: 35.000 r/min
Protection class: IP22
Heating element overheat thermostat.
(Automatic reset)

Mechanical specifications

Airflow: 3333 l/min (200 m³/h)
Air speed: 396 km/h
Noise level at 2m: 76 dB
Output air temperature at an ambient T. of 21° C: 40°C
Outer casing type: ABS 3mm
ON/OFF heating element
HEPA H13 filter included

Packaging specifications


- Type of individual package: Single cardboard box with expanded polystyrene and a plastic bag
- Dimensions of individual package: 735 x 371 x 330 mm
- Weight of individual package: 9 Kg
- Product dimensions: 680x300x250 mm
- Product weight: 8,5 kg
- Units per box: 1
- Units per pallet: 9 (*)

(*) Height below 1.1 m.

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify the products and their specifications without prior notice

Dimensions: ± 3%

Reviewed by: EJO V_01 (04/2015)

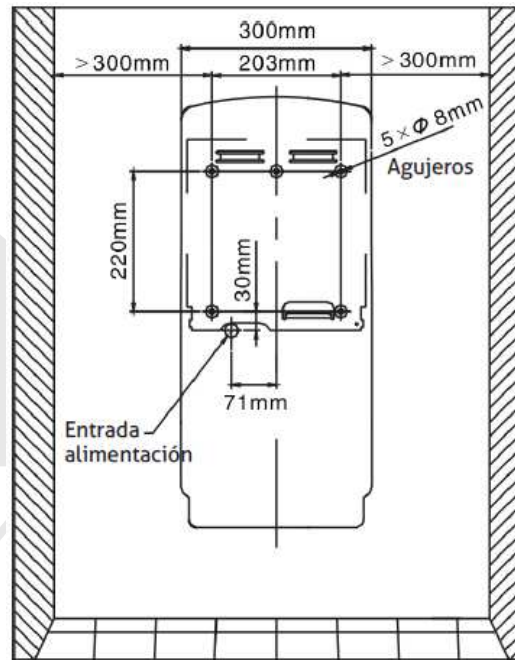

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.