



### Product description

Surface hand dryer, paper towel dispenser and waste receptacle  
 AISI 304 stainless steel structure, 0,8mm thickness  
 AISI 304 stainless steel doors, 1,2 mm thickness  
 Paper towel dispenser 600 uses C-folded or 800 uses Z-folded  
 Waste receptacle, 27 liters capacity  
 Satin finish  
 Heavy duty

### Technical specifications:

Surface hand dryer, paper towel dispenser and waste receptacle. The product consists of a main structure, a hand dryer, a paper towel dispenser and a waste receptacle. The main structure, manufactured in folded 0,8mm thickness AISI 304 stainless steel, has in its front part the hand dryer, paper dispenser and the waste receptacle. The hand dryer is installed in the superior part of the structure and has an infrared electronic sensor installed. It activates once the hands are placed on the hole below the hand dryer and it is automatically turned off once the hands are removed or after 60 seconds. The motor inside is universal with brushes, 8.200 r.p.m, delivers an airflow of 4500l/min (270m<sup>3</sup>/h) at a speed of 108km/h. The hand dryer has a total power of 2400W with a maximum consumption of 10,8 A. Sound level at 2 meters is of 74 dB. The paper towel dispenser, manufactured in folded AISI 304 stainless steel, can contain C-folded or Z-folded paper towels. The waste receptacle, manufactured in folded AISI 304 stainless steel, has a total of 27L capacity. Both units have a 1,2mm AISI 304 stainless steel door with high resistance lock (2 keys included) and continuous hinge. The furniture has a satin finish that assures high resistance to corrosion. The total measures of the product are 1650x370x160mm. The compact furniture code is GW09 07 04 01, manufactured by GENWEC WASHROOM S.L. - Av. Joan Carles I, 46-48 - c.p: 08908 L'Hospitalet de Llobregat - Barcelona (Spain). [www.genwec.com](http://www.genwec.com).

### Technical characteristics

#### Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz  
 Maximum intensity: 10.8 A  
 Total power: 2400 W  
 Heating element power: 2100 W  
 Motor power: 300 W  
 Motor type: Universal with brushes  
 Rotor speed: 8200 r.p.m.  
 Electrical isolation: Class I  
 Protection index: IPX1  
 Automatic turn-off security: 60"

#### Mechanical specifications

**Towel dispenser**  
 600 – 800 uses. Towels typo 'C' y type 'Z'.  
 Frontal opening with lock


**Hand dryer**  
 Air flow: 4.500 l/min (270m<sup>3</sup>/h)  
 Air speed: 108 km/h  
 Sound level at 2m: 74 dB

**Bin**  
 27 liters. Frontal opening with lock

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify products and their specifications without prior notice.

Measures: ±3%

Revised by: GWC\_v2 (02/2019)

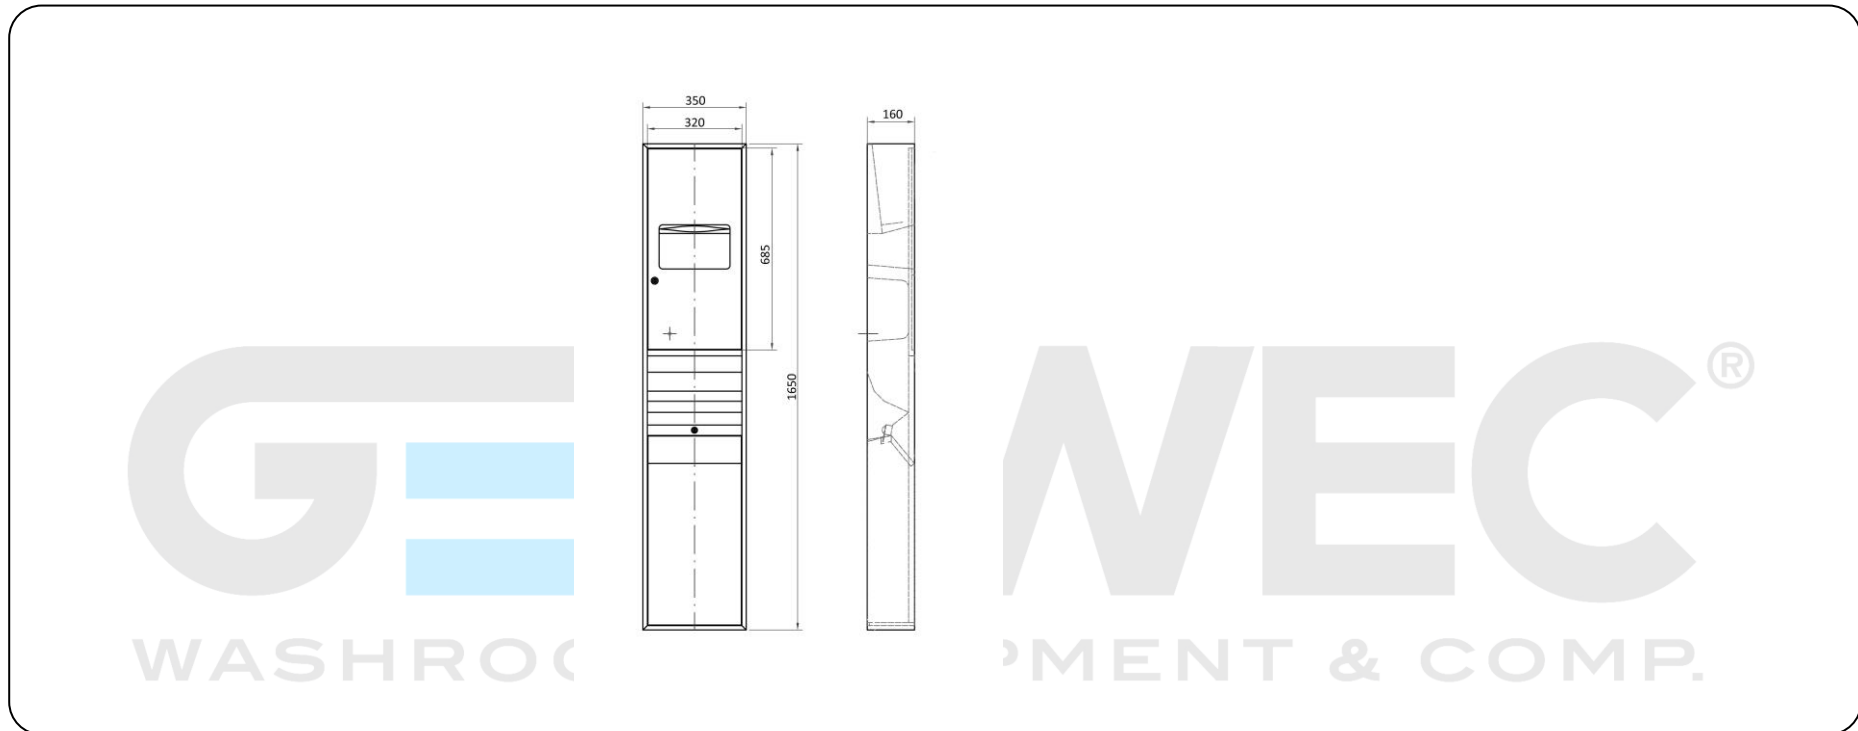

**Cleaning:** A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off.