



Product description

Eyes-washing in high resistance ABS and anti-UV methacrylate with stainless steel base
Automatic flow-rate reducer
Operated by lateral push lever
Green emergency epoxy finishing
Two spigots of low pressure ventilated water

Technical specifications:

Wall mounted eyes-washing. The product composes of a base, a bowl and two spigots. The bowl and the spigots are located on the top of the stainless steel base. The support of the spigots is inside the anti-UV methacrylate. The spigots and their support are made of chromed brass tube. The water supply must ensure a minimum flow of eyes-washing of 6l/min. at a pressure of 2 bar for 15 minutes. The eye-washing supplies a flow of 11 l/min. under pressures from 1 to 9 bar. The set has a green emergency epoxy finishing. The product is fixed to the floor with 3 screws located on the base and should be positioned so that the spigots are located at a height between 80 and 115 cm. The product code is GW12 02 03 05, manufactured by GENWEC WASHROOM, S.L. - www.genwec.com

Product specifications


Stainless steel base

ABS and anti-UV methacrylate bowl.

Two spigots made of chromed brass tube.

Green emergency epoxy finishing.

EYE WASHERS AND EMERGENCY SHOWERS **GW12 02 03 05 Floor standing Eyes washer**

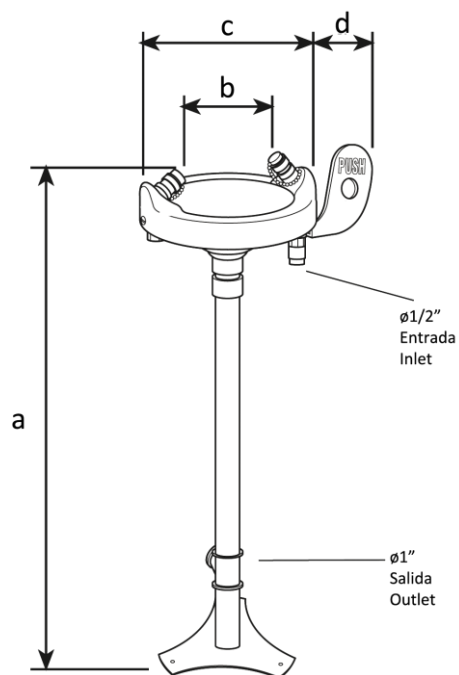

A: 1050 mm
B: 180 mm
C: 300 mm
D: 125 mm

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children

Use recommendations: The staff must be trained in the use of the eye-washing. The eye-washing must be checked every two days.