

GRAB BARS

GW11 77 04 01 Padded backrest**Product description**

560 mm padded backrest
1,5 mm AISI 304 stainless steel tubing with 32 mm outside diameter
Satin finish
Padded made of white Polyurethane
Heavy duty

Technical specifications:


560 mm AISI 304 stainless steel padded backrest. The tube has an outside diameter of 32 mm with a thickness of 1,5 mm, bended on both ends 90°. Mounting flanges are manufactured in AISI 304 stainless steel with 2.5 mm thickness and 76,9 mm de diameter and are fixed to the ends of the bar using M10 screws. Mounting flanges have three holes for wall attachment. Snap flange covers are manufactured in AISI 304 stainless steel with 0,5mm thickness and 77,6 mm diameter. Each cover snaps over mounting flange to conceal mounting screws. The assembled unit has suitable resistance to corrosion. The backrest fixed to the wall by means of 6 nylon wall plugs (8X50) and AISI 304 stainless steel screws (5X60). Grab bar will support loads in excess of 120Kg if properly installed. The product code is GW11 77 04 01 manufactured by GENWEC WASHROOM S.L. – Av. Joan Carles I, 46-48 ES 08908 L'Hospitalet de Llobregat, Barcelona (Spain).

Technical characteristics**Product specifications**

- Mounting flanges manufactured in AISI 304 stainless steel with 2,5 mm thickness and 76,9 mm diameter
- AISI 304 stainless steel tubing with 32 mm outside diameter and 1,5 mm thickness
- Snap flange covers manufactured in AISI 304 stainless steel with 0,5 mm thickness and 77,6 mm diameter
- Satin finish
- Padded part made of white Polyurethane for extra resistance
- Grab bar supports 120 Kg if properly fixed

GRAB BARS

GW11 77 04 01 Padded backrest

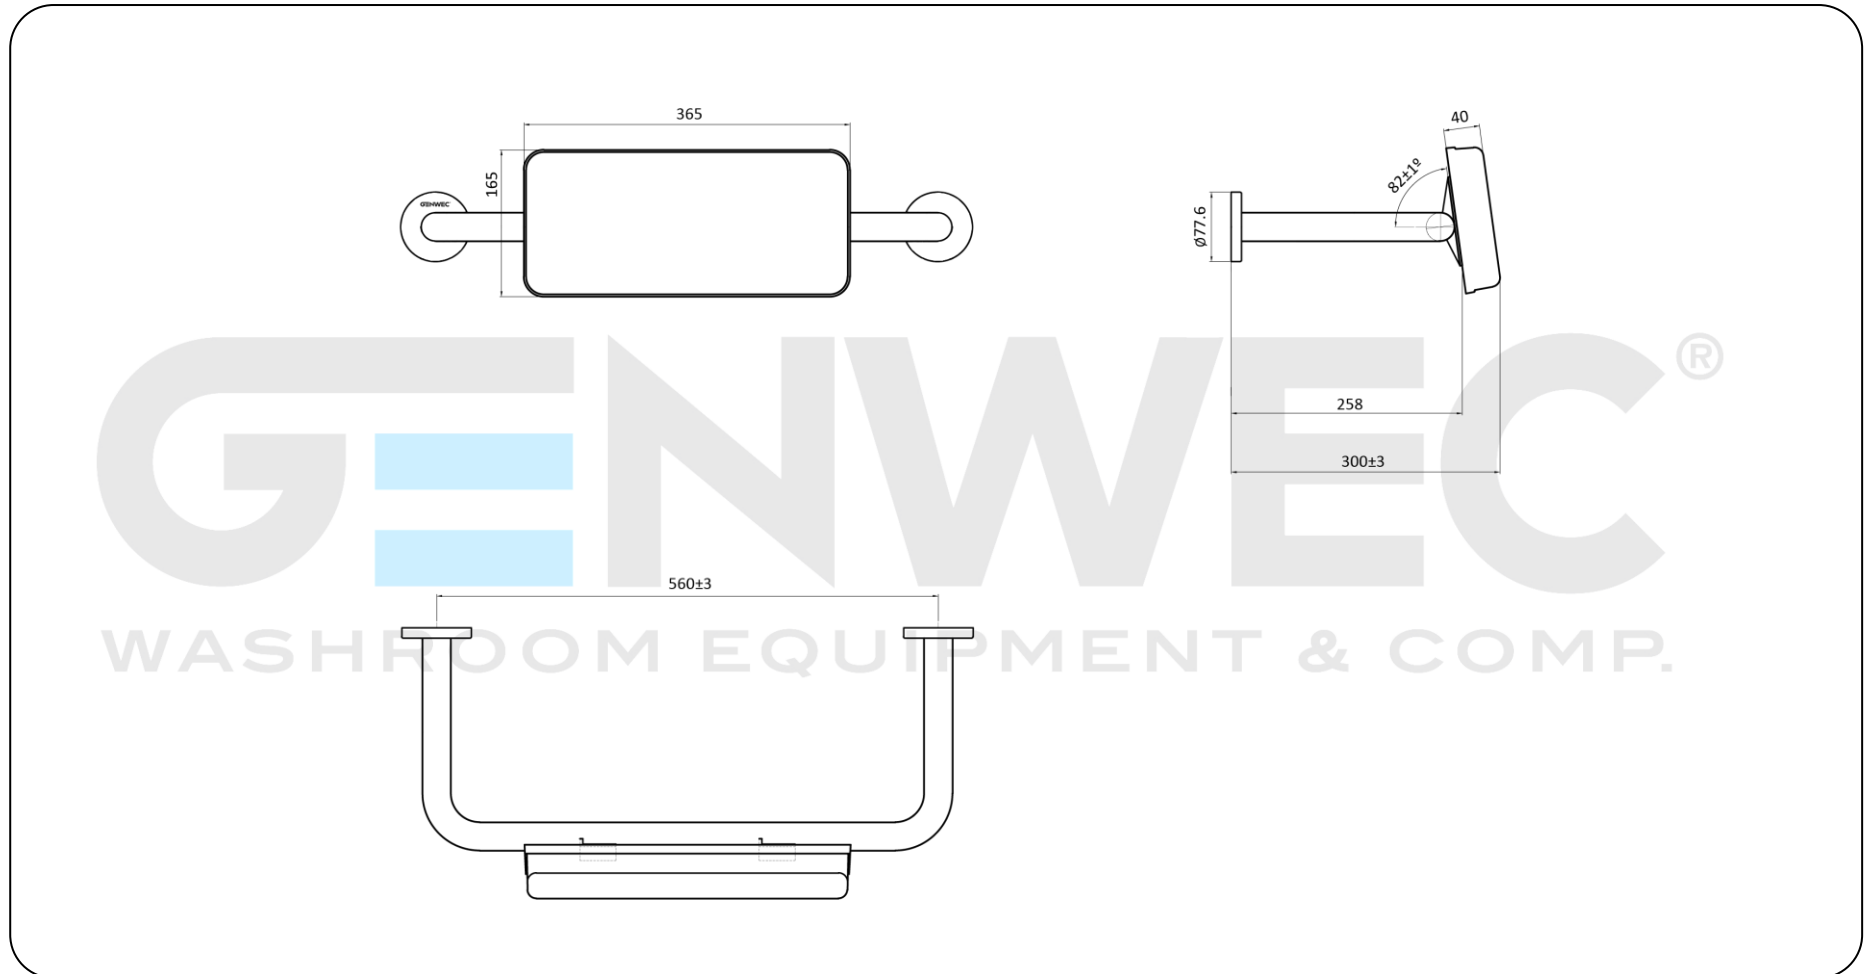

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off.