

## SOAP DISPENSERS GW13 19 06 02 Behind mirror automatic soap dispenser



### Descripción del producto

Finish: Chromed

Operation: Sensor activated

Behind mirror mounted

Capacity: 1000ml

### Technical specifications:

The automatic behind mirror mounted soap dispenser is made of plastic (bottle) with a metal support and the nozzle with a chrome plated finish. The soap dispenser is activated by sensor located in the base. It can be filled with different viscosity of soap solutions. Powered by IP67 Battery box or DC 6 V power supply. The total dimensions of the dispenser are 436 x 96 x 108. The soap dispenser model is GW13 19 06 02, manufactured by GENWEC WASHROOM S.L. - Av. Joan Carles I, 46-48 - ES 08908 L'Hospitalet de Llobregat - Barcelona (SPAIN). [www.genwec.com](http://www.genwec.com)

### Technical characteristics

#### Product specifications

Ambient temperature : 1-40°C

Humidity: Max 90RH

Soap volume: 0.6 – 2ml (depending on soap characteristics).

Bottle volume: 1000ml

DC Battery box: 4 x "D" type batteries (\*)

AC wall plug not included. Could be offered as GW13 19 90 00 (EU Plug) and GW13 19 90 01 (UK Plug)

AC wall plug characteristics: Input 100 – 240 V, 50/60 Hz / Output DC 6 V 1000mA / Cable length 1.2mts

(\*) Batteries not supplied.

### Usage and operation

Do not install in areas with strong magnetic or severe vibration.


Only clean product with neutral detergent and soft cloth.

Never use benzene, thinner or acid detergent.

Impurities on soap liquid can reduce flow rate or cause malfunction.

Keep sensor clean from soap debris or other elements.

Please respect next distances for correct usage of the product:




GENWEC WASHROOM S.L. reserves the right to modify and/or rectify the products and their specifications without prior notice

Dimensions: ± 3%


Reviewed by: GWC\_v3.1 (04/2021)

SOAP DISPENSERS **GW13 19 06 02 Behind mirror automatic soap dispenser**

**PRODUCT SIZE**

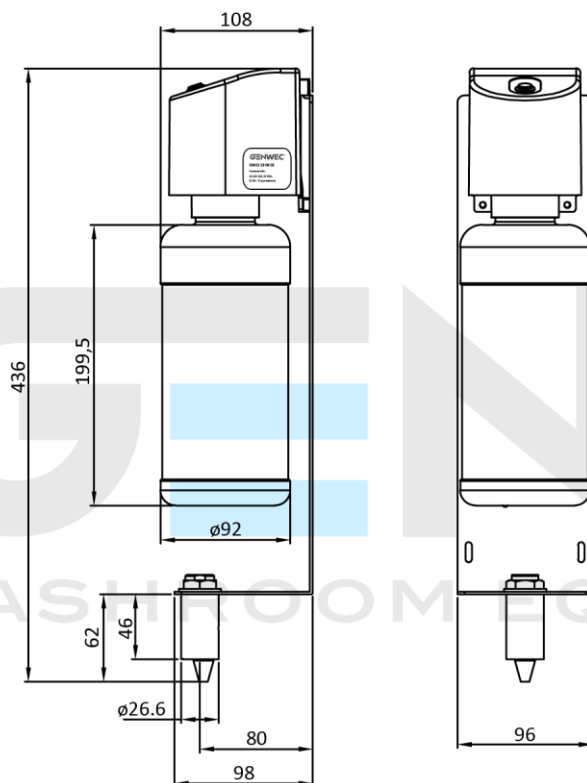

**SUPPORT (MOUNTING HOLES)**

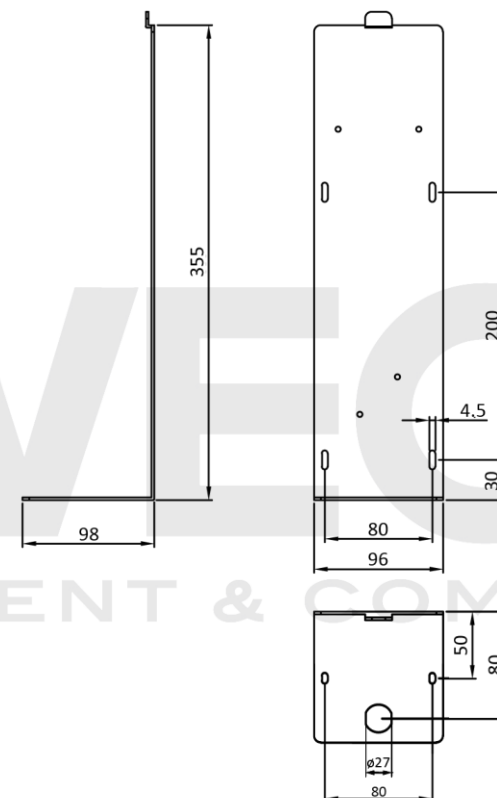

Note: we recommend for nozzle board hole a minimum diameter of  $\varnothing 27$ mm to give enough clearance.

**Cleaning:** A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify the products and their specifications without prior notice

Dimensions:  $\pm 3\%$

Reviewed by: GWC\_v3.1 (04/2021)