

HAND DRYERS
GW01 14 04 01 Model WECflow brushed stainless steel

Product description

Hot air hand dryer
 Operates by electronic sensor.
 Brushed stainless steel casing.
 Extremely tough
 3-year warranty

Technical specifications:

The hot air hand dryer consists of a one-piece casing in stainless steel with a polycarbonate grille on the bottom end and a base, made in ABS plastic, that serves as support for the volute-nozzle made in flame-retardant thermoplastic. The base-casing assembly which makes up the hand dryer is fixed to the wall by means of 4 holes with the dimensions for an 8 mm drill bit. The dryer is operated by an electronic infra-red sensor, and it automatically stops after the hands have been withdrawn from the sensor field. The universal brushless motor, located in the centre of the volute, produces 2800 r/min. The dryer delivers an airflow of 4000 l/min (240 m³/h) at a speed of 65 km/h. The air flows if the user continues to use it. The dryer has a total power rating of 1900W at 230V with a maximum consumption of 7.5A. The noise level at 2 meters is 60 dB. The protection class against splashing is IPX1. The total measurements of the hot air hand dryer are 355x255x148 mm, and its total net weight is 3.2kg. The hand dryer model is GW01 14 04 01, manufactured by GENWEC WASHROOM S.L. - Av. Joan Carles I, 46-48 - ES 08908 L'Hospitalet de Llobregat - Barcelona (Spain). www.genwec.com

Technical characteristics
Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz
 Maximum intensity: 7.5 A
 Total power rating: 1900 W
 Resistor power rating: 1740 W
 Motor power rating: 60 W
 Motor type: Universal, brushless
 Rotor speed: 2800 r/min
 Electrical insulation: Class I
 Protection class: IPX1
 Resistor overheat thermostat.
 (Automatic reset)

Mechanical specifications

Air flow: 4000 l/min (240 m³/h)
 Air speed: 65 km/h
 Noise level at 2m: 60 dB
 Output air temperature at an ambient T. of 21° C: 65°C
 Outer casing type: Stainless steel
 Protective grill in polycarbonate
 Volute-nozzle made of flame-retardant thermoplastic.

Packaging specifications


- Type of individual package: Single cardboard box with expanded polystyrene and a plastic bag
- Dimensions of individual package: 275 x 190 x 360 mm
- Weight of individual package: 3,5 Kg
- Product dimensions: 355x255x153x148 mm
- Product weight: 3.20 kg
- Units per box: 4
- Units per pallet: 32 (*)

(*)Height below 1,1m.

HAND DRYERS

GW01 14 04 01 Model WECflow brushed stainless steel

GENWEC®
WASHROOM EQUIPMENT & COMP.

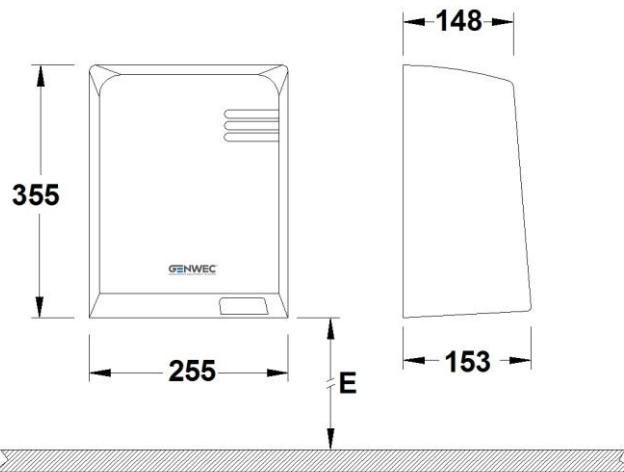

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off. Do not use any strong chemicals or cleaning agents that can be dangerous to children.