GENWEC®

COMPACT FURNITURE GW09 01 04 01 Hand dryer, paper towel dispenser and waste receptacle



Product description

Recessed hand dryer, paper towel dispenser and waste receptacle AISI 304 stainless steel structure, 0,8 mm thickness AISI 304 stainless steel doors, 1,2 mm thickness Paper towel dispenser 600 uses C-folded or 800 uses Z-folded Waste receptacle, 27 liters capacity Satin finish Heavy duty

Technical specifications:

Recessed hand dryer, paper towel dispenser and waste receptacle. The product consists of a main structure, a hand dryer, a paper towel dispenser and a waste receptacle. The main structure, manufactured in folded 0,8 mm thickness AISI 304 stainless steel, has in its front part the hand dryer, paper dispenser and the waste receptacle. The hand dryer is installed in the superior part of the structure and has an infrared electronic sensor installed. It activates once the hands are placed on the hole below the hand dryer and it is automatically turned off once the hands are removed or after 60 seconds. The motor inside is universal with brushes, 8.200 r.p.m, delivers an airflow of 4500l/min (270m3/h) at a speed of 108km/h. The hand dryer has a total power of 2400Wwith a maximum consumption of 10,8 A. Sound level at 2 meters is of 74 dB. The paper towel dispenser, manufactured in folded AISI 304 stainless steel, can contain C-folded or Z-folded paper towels. The waste receptacle, manufactured in folded AISI 304 stainless steel, has a total of 27 liters of capacity. Both units have a 1,2mm AISI 304 stainless steel door with high resistance lock (2 keys included) and continuous hinge. The furniture has a satin finish that assures high resistance to corrosion. The total measures of the product are 1650x370x160mm. The compact furniture code is GW09 01 04 01, manufactured by GENWEC WASHROOM S.L. - Av. Joan Carles I, 46-48 - 08908 L'Hospitalet de Llobregat - Barcelona (Spain), www.genwec.com.

Technical chacteristics

Electrical specifications

Voltage/Frequency: 220-240 V 50/60 Hz

Maximum intensity: 10.8 A Total power: 2400 W

Heating element power: 2100 W

Motor power: 300 W

Motor type: Universal with brushes

Rotor speed: 8200 r.p.m. Electrical isolation: Class I Protection index: IPX1

Automatic turn-off security: 60"

Mechanical specifications

Towel dispenser

600 – 800 uses. Towels typo 'C' y type 'Z'.

Frontal opening with lock

Hand dryer

Air flow: 4.500 l/min (270m₃/h) Air speed: 108 km/h

Sound level at 2m: 74 dB

Bir


27 liters. Frontal opening with lock

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify products and their specifications without prior notice. Measures: ±3%

Revised by: Fernando Royo_V3 (03/2019)



COMPACT FURNITURE GW09 01 04 01 Hand dryer, paper towel dispenser and waste receptacle

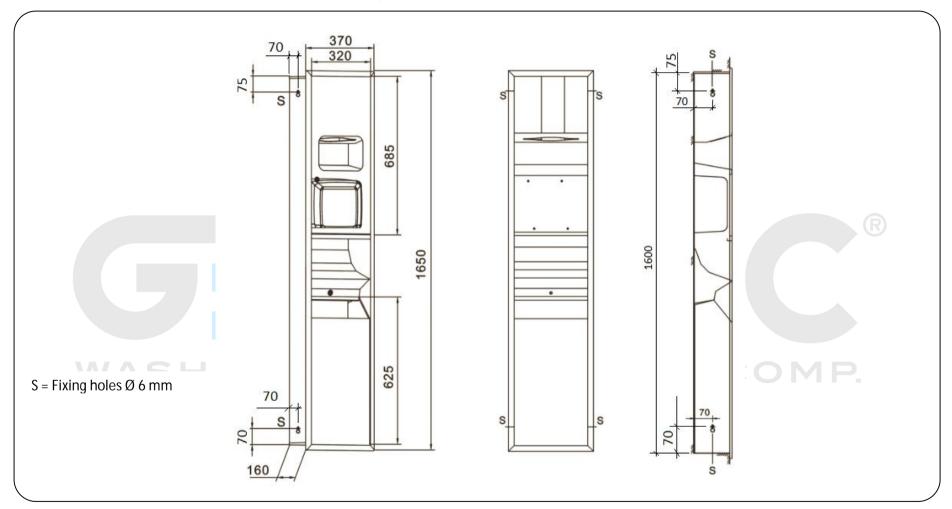

Cleaning: A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off.